



RETRACTABLE SCREENS

Adjustable Track with Cover

AND OPTIONAL

Receiving Channel

Rolls Shading adjustable track system provides you with the same quality you are accustomed to, plus a sleeker new look, with ease of installation. The enhanced system eliminates screw hole caps, and allows bottom bar to retract further into the hood. Using the adjustable track combined with the new receiving channel provides exceptional function for flush mounted plumb installations.

Install the screen, lower it, and push the inner tracks until taught, then screw them together, it's that simple!

FEATURES AND BENEFITS

New Adjustable Track System Benefits

- Outer track has a sleek cover, and reinforced walls
- Inner track features a new continuous end retention system, easy installation
- Countersunk screws 1-side only
- Cover provides smooth, seamless look without screw hole caps
- New tracks are interchangeable with current adjustable tracks
- Quick and easy assembly

Installation Ease:

- End retentions attach to zipper for seamless travel in tracks
- Zipper secured to end retention helps to relieve tension in the screen
- Full-length zipper allows bottom bar to retract further into the hood
- Redesigned entry guide provides

both, easy installation and removal, of inner track

- No longer any need to lift bottom bar above end retention to install into track
- Inner track can easily be removed and replaced for servicing

Track Differences/Interchangeability

- New Outer/ Old inner: 1 screw
-(DO NOT screw on cover side)
- Old Outer/ New Inner: 2 screws
- New Outer/ New Inner: 1 screw
-(DO NOT screw on cover side)
-Inner Track with entry guide fits flush with outer track

Receiving Channel Option

- Provides flexibility for trap-mounting tracks on walls that aren't plumb (straight).

**NEW
ENHANCED
DESIGN**

New Track Base

New Entry Guide

Adjustment Screw
#6-32 x 1 Philips
Head SMS, 410 SS,
tap thread



New Inner Track

Adjustment Screws

New Track Cover

Available in all 4-colors
standard colors:


- Beige
- Bronze
- Ivory
- White

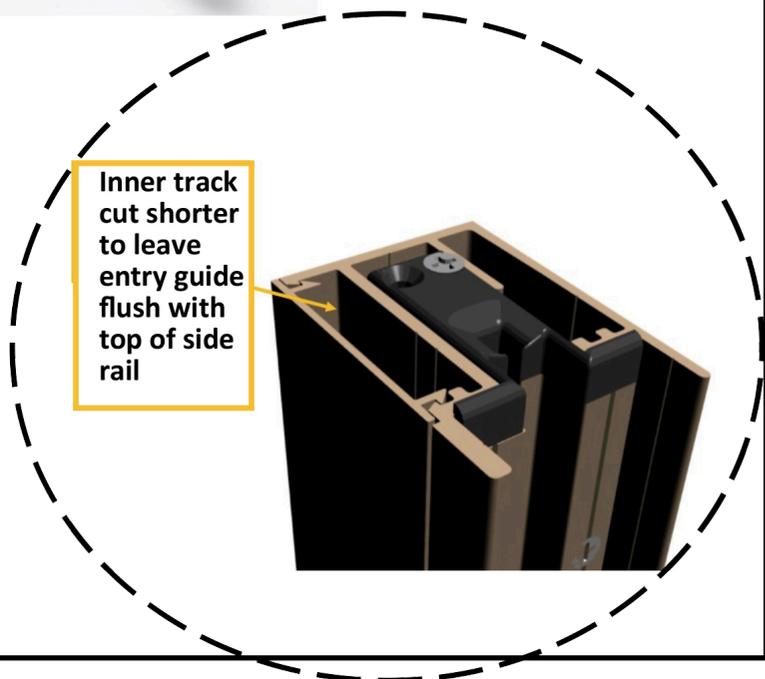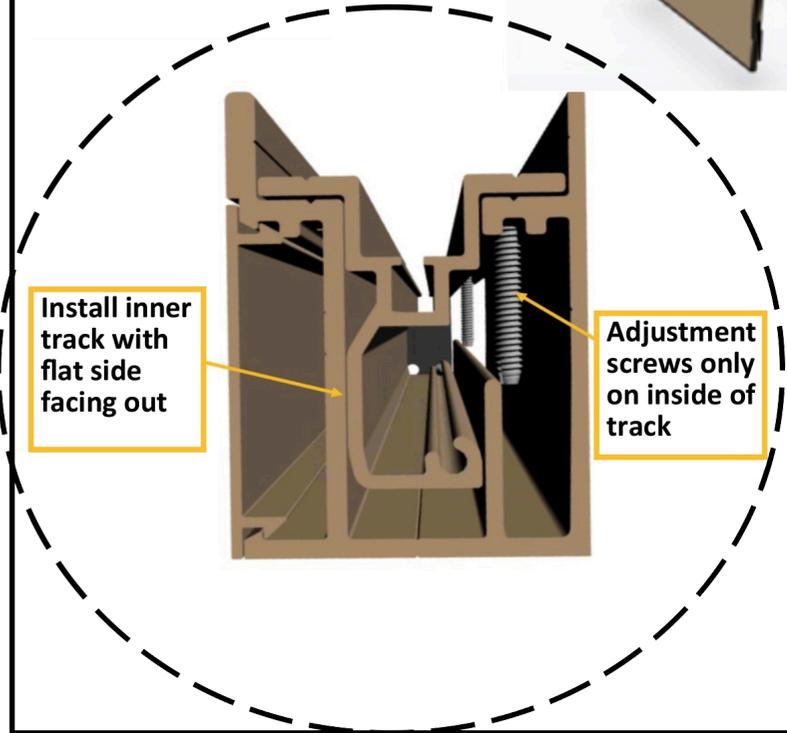


During Installation, pull zipper tight and secure to end retention of bottom bar on both sides. Trim excess with scissors.



Install inner track by tilting and sliding up through the outer track and bottom bar, then fasten with adjustment screws.

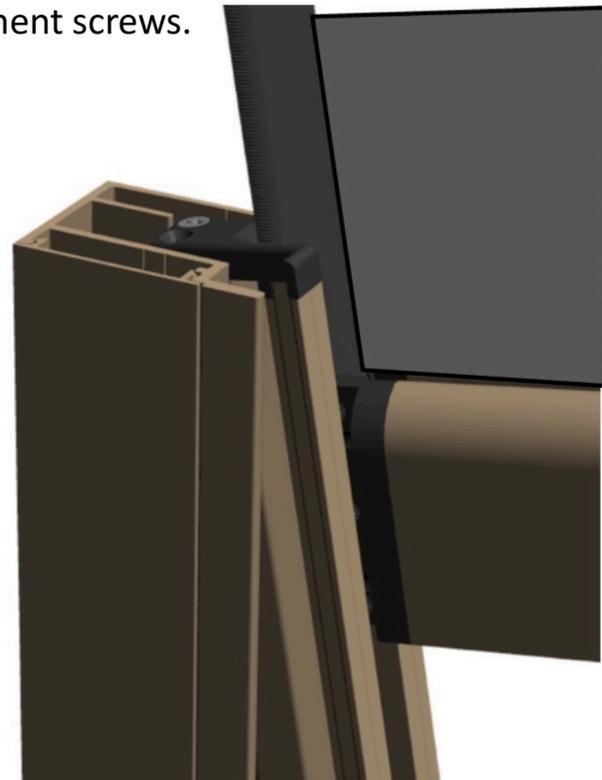

Continuous zipper allows to comfortably have the bottom bar reside further into the hood

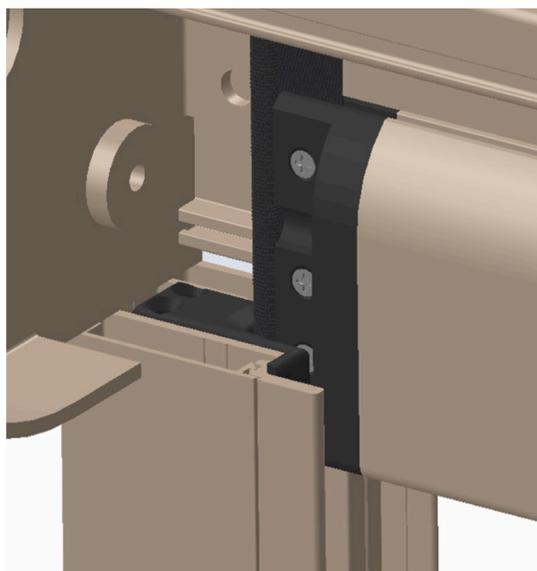

Receiving Channel Option

Provides flexibility for trap-mounting tracks on walls that aren't plumb straight. Outer track resides within receiving channel for optimum adjustability.

